




碳钢秤体标配仪表AS131-PL
Standard Configuration to Mild Steel Scale
body Indicator AS131-PL

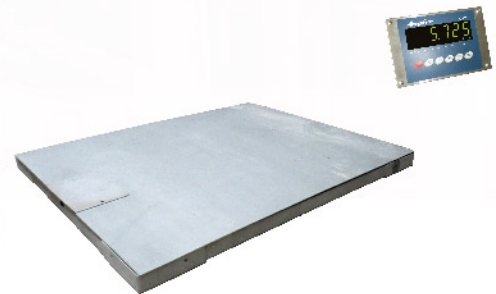

不锈钢秤体标配仪表AS131-SS
AS131-SS Standard Configuration to Stainless
Steel Scale body Indicator AS131-PL

DH/DHS Pit Type Platform Scale DH/DHS护框型地上衡

强度高，经久耐用，自复位结构一次定型，可选配斜坡，称重更便捷

High intensity, Durable in use, Self-aligning structure, Optional ramp, Convenient weighing



DH/DHS系列护框型地上衡

DH/DHS Series Pit Type Platform Scale

碳钢/不锈钢带护框地磅，花纹板面板（不锈钢系列为光板面板），强度高，秤体都沉在基础内，手推车，托盘车，叉车等任何的加载方法都可以无障碍的进行。

Mild steel/SST pit type platform scale, checked iron surface plate (surface plate of SST models is smooth.) and combined with serried channel steel girder form a higher strength and reliable platform scale. No parts of scale extending above the ground level make all kinds of load and unload by trolley, pallet truck and forklift be done without hindrance.

技术指标 Specification

准确度等级	Accuracy Grade	Ⅲ
称量范围	Weighing Range	1000kg~3000kg
秤体高度	Height	90mm
工作温度	称重显示仪表 Weighing Indicator	-10℃ ~ +40℃
Working Temperature	秤体及传感器 Scale and Load Cell	-35℃ ~ +65℃
相对湿度	Relative Humidity	≤95%(需无结露) Free of Moisture Condensation
工作电源	交流 AC	100 - 240VAC 50/60Hz 宽电压输入 100 - 240VAC 50/60Hz wide voltage input
Power Supply	直流 DC	镍氢可充电电池(选件) Nickel metal hydride rechargeable batteries (option)
防护等级	Protective Grade	秤体IP65/仪表AS131-PL,IP54/仪表AS131-SS,IP65
传感器	Load Cell	H8C-W2/B8D-W2

功能特点 Functional features

- 护框型，自复位机构一次定型 Pit type,self-restoring structure can be instant molding
- 可选配斜坡，称重更便捷 Can match with Ramp and more easily weighting

型号规格 Model & Specification

型号规格 Type	最大称量Capacity (kg)		
	1000 kg	2000 kg	3000 kg
DH/DHS0808	★	★	★
DH/DHS1010	★	★	★
DH/DHS1012	★	★	★
DH/DHS1212	★	★	★
DH/DHS1215	★	★	★
DH/DHS1515	★	★	★
DH/DHS1520	★	★	★
检定分度值(Verification Interval) e=(g)	0.5	1	1

注：表中的规格为台面尺寸（1010表示台面尺寸为1000×1000mm）

Remark: Dimension in the table is for the pan(1010 means the base and pin dimension is 1000×1000mm)