



HIWEIGH®

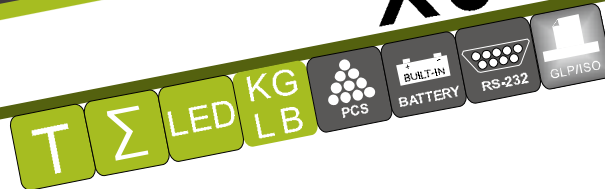

### Sizes

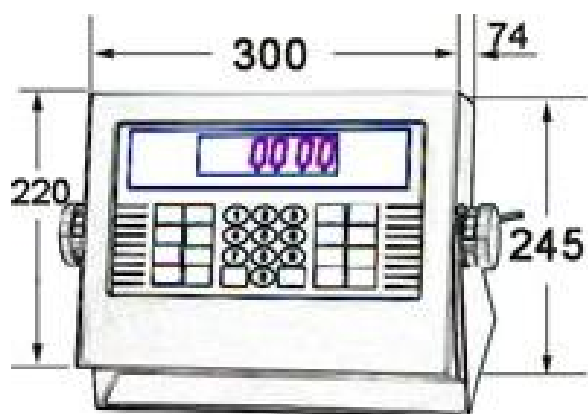

### Specifications

- ◆ Completely Stainless Steel Housing
- ◆ Indicator can be replaced without recalibration
- ◆ Four-point calibration
- ◆ Low battery indication and automatic power-off
- ◆ Store and recall up to 10 unit prices
- ◆ Lock display when overload is greater 130%FS
- ◆ Accuracy can be increased ten times
- ◆ Real-time clock
- ◆ Green LED
- ◆ Drive up to 16 load cells
- ◆ Store and recall up to 200 vehicle data
- ◆ Store and recall up to 1000 weighing records
- ◆ Classify statistics
- ◆ Parallel Output interface
- ◆ RS232 serial interface
- ◆ Optional RS485 serial interface
- ◆ Selectable kg and lb

HIWEIGH

www.hiweigh.com  
 Email: hiweigh@gmail.com hiweigh@hotmail.com  
 Tel: 0086-21-24281404 Fax: 0086-21-24281385  
 Add: No. 2278, Zhaotai Road, Minhang District,  
 Shanghai 201112, China